

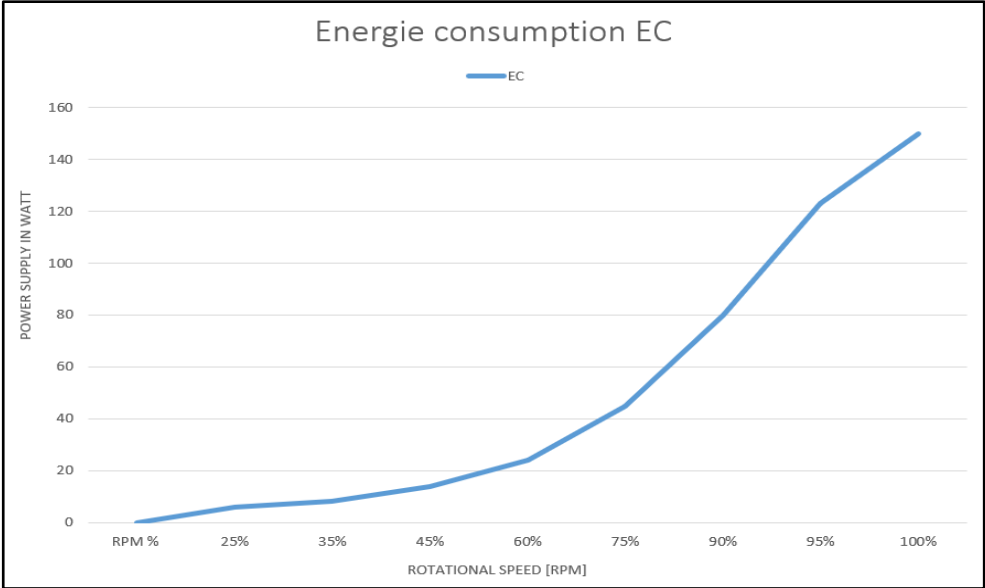


Specifications

Description	ClimaFlow Fan EC
Line voltage	1 ~ 200...240 V, 50/60Hz P1 130W 1,4-1,15A
Rated values	60°C IP54 THCL 155
Motor	cЯUus UL Recognized Component
Power connection out	Incl. power cable 2M – Inc. Wieland Plug 96.032.4053.1
Adjustable control	0-10 Volt
Control cable	Length control cable ca. 2M incl Junction box
Motor protection	Integrated active temperature management
Quality of bearing	Ball bearing with long-time lubrication
Color of rotor	Marine blue
Material rotor	Steel
Quality of blade	Vanes equipped with whisper-quiet technology
Color of blade	Blue
Material blade	Aluminum
Material of construction	Stainless steel
Material of mounting strip	Galvanized steel
Material of basket	Galvanized steel + white powder coated
Protection	Incl. basket
Suspension system	Mounting strip and truss bracket
Control area	Each vertical fan has a control area of approx. 256 m²/2700 ft²
0-10 Volt output	Voltage supply for external devices 10 V, I _{max} 10mA (short circuit proof)
Harmonics	The Climaflow Fan does not include a Harmonic filter. ClimaFlow Fan groups must not be connected across three phases and one ground.
CMF	4425 CFM
W/CFM	22,1 Watt/CFM

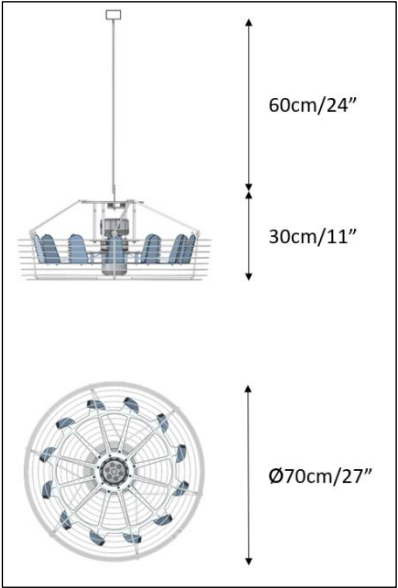

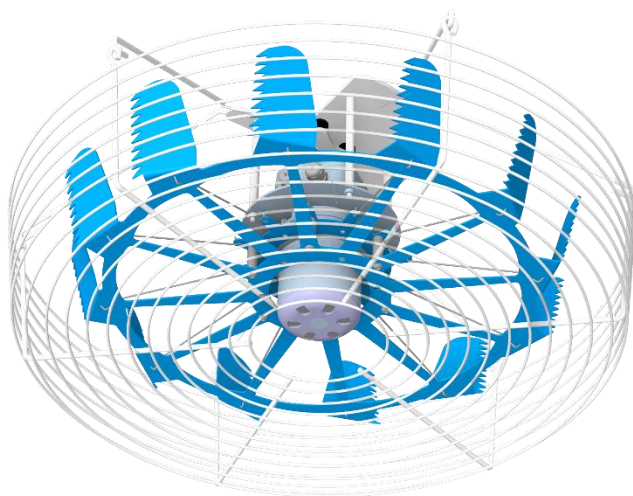

RIGHTS Copyright © Ludvig Svensson, Bleiswijk 2016. All rights reserved.
Names marked with a ® are registered trademarks of Hinoval.

These terms of delivery can be viewed on our website www.hinova.nl and we will send you a free copy on request. In addition, supplementary contractual and/or general terms by your Hinoval partner or installer may apply. In case of contradictions, the terms of the dealer/installer shall prevail.